

Material Reference Guide

Material Reference Guide

BLACK text color indicates 10.6µm laser

RED text color indicates 1.06µm laser

BLUE text color indicates 9.3µm laser


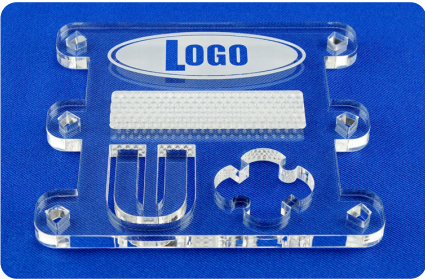

Categories	Materials	Marking	Engraving	Photo Imaging	Cutting
Ceramics		Alumina	•		•
		Zirconia	•		•
Laminating Adhesives		Laminating Adhesive Tape	•		•
		Laminating Adhesive Foam	•		•
Films		Optically Clear Adhesive Anti-reflection Film		•	•
Fabrics		Denim	•		•
		Twill			•
		Cotton			•
		Felt		•	•
Foams		Polyethylene Foam		•	•
		Polyurethane Foam		•	•
Glass		Soda-Lime Glass	•	•	•
		Gorilla Glass	•	•	•
		Fused Silica	•	•	•
Metals		Anodized Aluminum	•		•
		Stainless Steel	•	•	•
		Carbon Steel	•	•	•
		Brass	•		•
		Copper	•		•
		Titanium	•		•
		Bare Aluminum	•	•	•

Material Reference Guide

BLACK text color indicates 10.6µm laser

RED text color indicates 1.06µm laser

BLUE text color indicates 9.3µm laser

Categories	Materials	Marking	Engraving	Photo Imaging	Cutting	
Natural Materials		Leather	•	•	•	•
		Stone	•	•	•	•
		Wood	•	•	•	•
		Paper	•	•	•	•
		Mat Board	•	•	•	•
		Cardboard	•	•	•	•
		MDF	•	•	•	•
Plastics		Acrylic (Plexiglas®, Lucite®)	•	•	•	•
		ABS	•	•	•	•
		ABS	•	•	•	•
		PET	•	•	•	•
		Polycarbonate	•	•	•	•
		Polycarbonate	•	•	•	•
		Polyester (PETG, PETP)	•	•	•	•
		PTFE (Teflon®)	•	•	•	•
		POM (Delrin®)	•	•	•	•
POM (Delrin®)	•	•	•	•		
Rubber		Natural Rubber	•	•	•	•
		Synthetic Rubber (Neoprene, Silicone)	•	•	•	•

Marking: create a visible mark on the surface with no depth

Engraving: remove a thin layer of material from the surface. The contrast of the engraved area will depend on several factors.

Photo Imaging: create a realistic photographic image on the material

Cutting: cut entirely through the material

Laser Power: a Laser power source range of 10W to 150W, depending upon material and its thickness were needed to mark, cut, engrave or photo image these materials.